



PNEUMATIC TUBE AND ONE TOUCH FITTINGS



PU Tubing

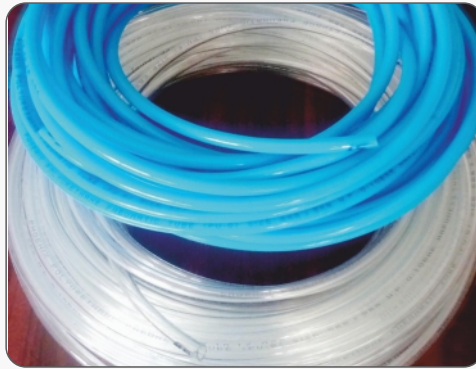

PU Tubing

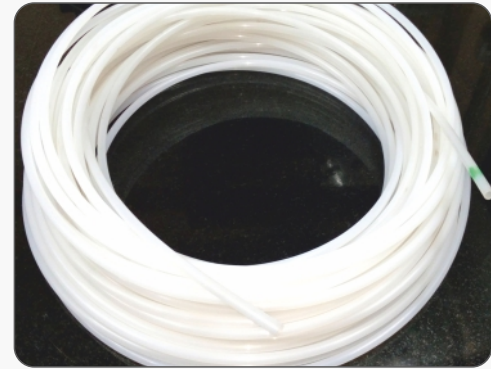

Nylon Tubing

Structure:

Polyurethane (PU) Tubing Transparent / Blue / Yellow / Black,

Working Pressure:

10kg/cm²

Sizes

O.D

OD Tolerance :

±0.1mm

Application

Pneumatic tube and One touch fittings for all types of pneumatic cylinders - directional control valves, solenoid valves and other valves - Air preparation units like filter, regulator and lubricators - Pneumatic control panels - All compressed air lines, all machineries controlled by pneumatic systems - pneumatic circuits in any industry.

PU Spiral



PU Tubing

ID x OD mm	Working Pressure Kg/cm ²	Standard Length
2 X 4	10	100 Mtrs
2.5 X 4	10	100 Mtrs
3 X 5	10	100 Mtrs
4 X 6	8	100 Mtrs
5 X 8	12	100 Mtrs
5.5 X 8	10	100 Mtrs
6 X 8	8	100 Mtrs
6.5 X 10	10	100 Mtrs
8 X 10	5	100 Mtrs
8 X 11	7	100 Mtrs
8 X 12	10	100 Mtrs
9 X 12	8	100 Mtrs
10 X 12	6	100 Mtrs
10 X 14	8	100 Mtrs
12 X 16	6	100 Mtrs

PU Spiral

ID x OD mm	Working Pressure Kg/cm ²	Standard Length
4 X 6	8	3 / 5 / 10/ 15 Mtrs.
5 X 8	12	3 / 5 / 10/ 15 Mtrs.
5.5 X 8	10	3 / 5 / 10/ 15 Mtrs.
6.5 X 10	10	3 / 5 / 10/ 15 Mtrs.
8 X 12	10	3 / 5 / 10/ 15 Mtrs.
12 X 16	6	3 / 5 / 10/ 15 Mtrs.

Nylon Tubing

Size O.D(mm)	Size I.D(mm)	Stand Length Meter	Working Pressure (kg/cm ²)	Tolerances MM
4	2.5	100	31	±0.10
6	4	100	27	±0.10
8	6	100	22	±0.10
10	8	50	15	±0.15
12	10	50	27	±0.15
16	12	50	19	±0.15

Pooja Shah - Sales
 +91-99784 42215 | +91-70690 96458
Chirag Shah - Technical
 +91-79903 36570
S.D. Shah - Director
 +91-90990 16044

flexaflexhoses@gmail.com
 www.flexaflexhoses.com
 www.hosesmarket.com

FLEXAFLEX HOSES INTERNATIONAL
 106, First Floor, Kailashpathi Chamber,
 Nr. Sunrise Restaurant, Reid Road,
 O/S Panchkuva Gate, Ahmedabad - 380 002